
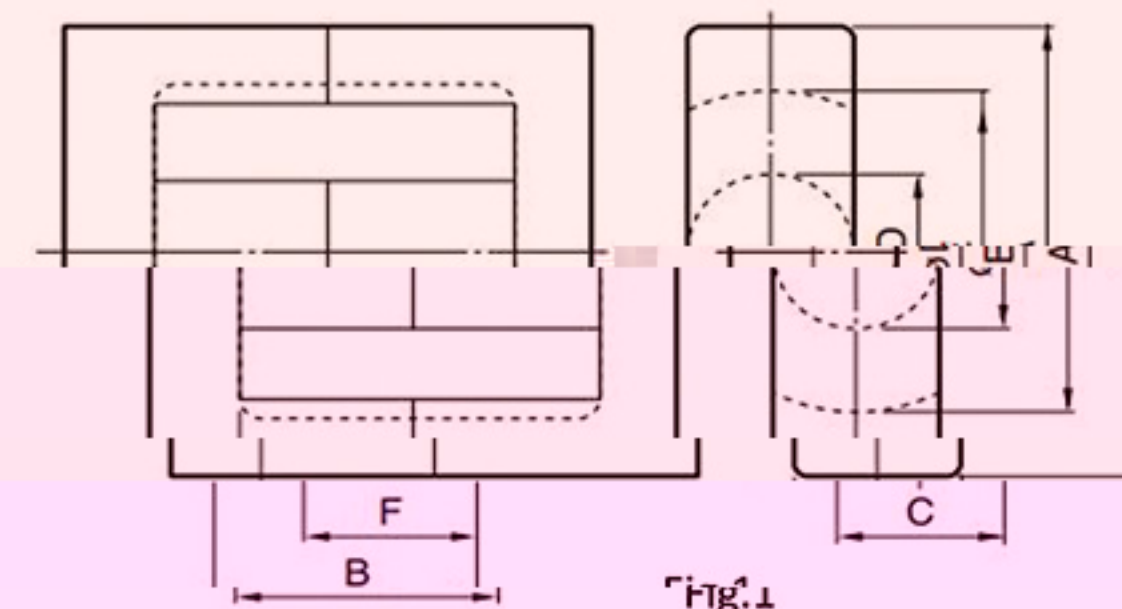


FERRITE CORE | ETD-Core

磁芯品名规则说明 (例)

SMP40.ETD19 7或A200

材质 磁芯形状 AL值 (Z:无气隙 A200:AL值为 2000H/N^2)

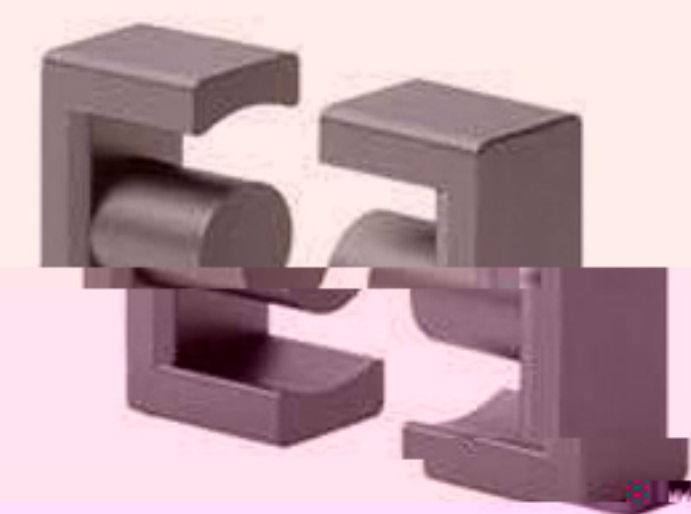

品名	形状	尺寸规格(Unit: mm)						磁芯常数	实效截面面积	最小实效截面面积	实效磁路长度	实效体积	重量	电气特性		IEC		
		磁芯形状	材质	图示	A	B	C							D	E		F	C1
1	ETD19	SMP40	Fig.1	19.6±0.5	13.65±0.15	7.4±0.2	7.4±0.2	14.9±0.5	9.4±0.2	1.250	44.10	39.50	55.30	2440	14	1750±25%	80±5%	ETD19
		SMP95													2000±25%	160±7%		
		SMP40													2125±25%			
2	ETD24	SMP47	Fig.1	24.40±0.6	14.45±0.15	8.50±0.3	8.50±0.3	18.60±0.6	10.1±0.2	1.053	59.20	55.00	62.30	3690	20	2200±25%	200±5%	ETD24
		SMP95													2800±25%	200±7%		
		SMP40													2500±25%			
3	ETD29	SMP47	Fig.1	29.8±0.8	15.8±0.2	9.5±0.3	9.5±0.3	22.7±0.7	11.0±0.3	0.927	76.40	70.90	70.80	5410	28	2600±25%	200±5%	ETD29
		SMP95													3250±25%	400±10%		
		SMP40													2750±25%			