

FERRITE CORE | UU-Core

磁芯品名规则说明(例)

SMP40 UU79/129/31

材质

磁芯形状

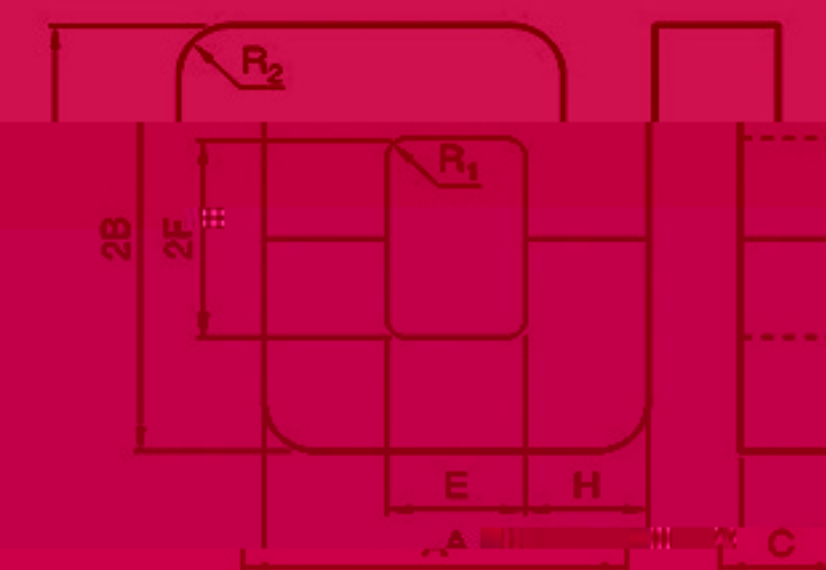


Fig.1

| NO. | 品名 | 形状 | 尺寸规格(Unit: mm) | | | | | | | | | | 磁芯 材料 | 实际截面 (mm ²) | 最小实际截 (mm ²) | 实际磁路 (mm) | 实际 (mm) | 重量 (g) | 电气特性 (mH) | BEC | |
|-----|-------------|-------|----------------|----------|-----------|----------|-----|----------|---------|----|----|------|----------|----------------------------|-----------------------------|--------------|------------|-----------|--------------|----------|------|
| | | | A | B | C | E | H | R1 | R2 | L1 | AE | Amin | | | | | | | | | Le |
| 1 | UU6.7 | SMH52 | Fig.1 | 6.7±0.15 | 14.7±0.3 | 5.7±0.1 | 2.9 | 6.0±0.3 | 2.2±0.1 | | | | | 4.280 | 8.08 | 7.84 | 34.55 | 279 | 2.85 | 900±25% | |
| 2 | UU10.5 | SMH72 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1000±25% | |
| | | SMP47 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1500±25% | |
| 3 | UU79/129/31 | SMP40 | Fig.1 | 79.0±2.5 | 129.0±2.5 | 10.2±1.0 | 2.5 | 10.5±0.5 | 2.2±0.1 | | | | | 22.7 | 10.46 | 10.46 | 139.91 | 139.21 | 139.91 | 1100 | 1080 |
| | | SMP90 | Fig.1 | 79.0±2.5 | 129.0±2.5 | 10.2±1.0 | 2.5 | 10.5±0.5 | 2.2±0.1 | | | | | 22.7 | 10.46 | 10.46 | 139.91 | 139.21 | 139.91 | 1100 | 1080 |

| | | | | | | | | | | | | | | | | | | | | |
|---|--------|-------|-------|----------|----------|---------|-----|----------|---------|--|--|--|--|-------|-------|-------|-------|-----|---|----------|
| 4 | UU10.5 | SMP40 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1000±25% |
| 5 | UU10.5 | SMP40 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1500±25% |
| 6 | UU10.5 | SMP40 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1000±25% |
| 7 | UU10.5 | SMP40 | Fig.1 | 10.5±0.3 | 15.6±0.5 | 5.0±0.2 | 5.2 | 10.5±0.5 | 2.5±0.3 | | | | | 3.170 | 12.50 | 12.50 | 40.30 | 504 | 5 | 1500±25% |