


FERRITE CORE | UU-Core

磁芯品名规则说明(例)
SMP40 UU79/129/31
 材质 磁芯形状

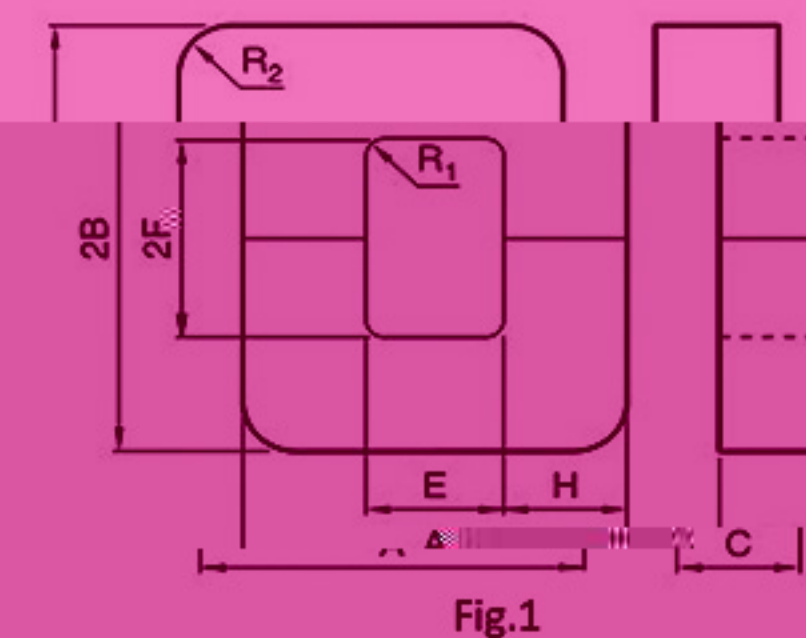

NO	品名	形状	尺寸规格(Unit: mm)										磁芯	实效截面	最小实效截	实效磁路	实效	重量	电气特性		IEC	
			W	2b	L	L	2a	H	R1	R2	Le	Ve							Weight	μi		μm
1	UU7	SMH52	Fig.1	8.7±0.15	10.147±0.3	10.147±0.3	2.8±0.1	3.9	10.6±0.3	2.8±0.1					4.280	8.08	7.84	34.55	279	285	900±25%	8303
		SMH72																			840min	
2	UU10.5	SMP47	Fig.1	10.5±0.3	15.6±0.5	5.0±0.2	5.2	10.5±0.5	2.5±0.3					3.170	12.50	12.50	40.30	504	5	10090±25%	83018	
		SMP90																			1500±25%	
		SMP40																			1000	69030±25%
		SMP95																			1103	5768±25%
		SMP40																			1630	6990±25%
3	UU79/129/31	SMP90	Fig.1	79.0±2.5	129.0±2.5	31.5±1.0	34	85.0±1.5	22.0±1.0	5	22	0.446	693.00	682.00	309.00	214220					1664	6696±35%
		SMP95																			1664	10000±25%
		SMP40																			1000	5640±25%
4	UU100/151/30	SMP90	Fig.1	100.0±3.0	151.0±2.5	30.0±1.0	39	90.0±1.5	30.0±1.5	5	20	0.389	915.00	900.00	300.00	224820					1664	6696±35%
		SMP95																			1664	10000±25%
		SMP40																			1000	5640±25%
5	UU101/115/25	SMP90	Fig.1	101.0±3.0	115.0±2.5	25.4±1.0	50	64.0±1.5	25.0±1.0	5	25	0.478	648.00	635.00	309.00	200350					1021	5395±25%
		SMP95																			1021	8200±25%
		SMP40																			1240	3960±25%
6	UU120/170/20	SMP90	Fig.1	120.0±3.0	170.0±2.5	20.0±1.0	50	60.0±1.5	20.0±1.0	5	25	0.478	648.00	635.00	309.00	200350					1021	5395±25%
		SMP95																			1021	8200±25%
		SMP40																			1240	3960±25%
7	UU80/150/30	SMP90	Fig.1	80.0±2.5	150.0±2.5	30.0±1.0	39	90.0±1.5	30.0±1.0	5	20	0.389	915.00	900.00	300.00	224820					1664	6696±35%
		SMP95																			1664	10000±25%
		SMP40																			1000	5640±25%